



V1.2

--
--
--

KE-GT(30-40)KTL4





1		6
2		10
3		16
4		24
5		25
6		29
7		32
8		33

1

1.1

▪

▪

▪

▪

▪

▪

▪

▪

▪

▪

▪


▪

▪

■



1.3

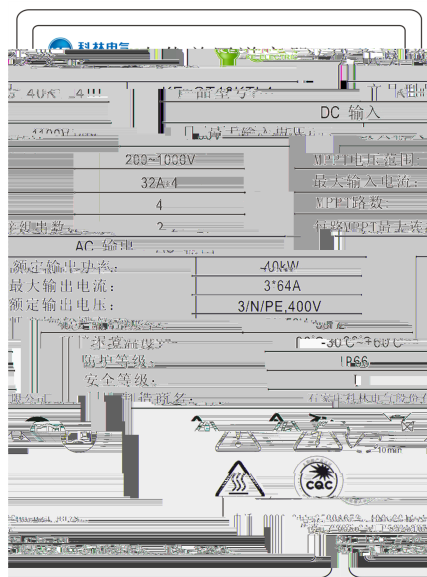

[illegible]

2

2.1







2.2





2.3



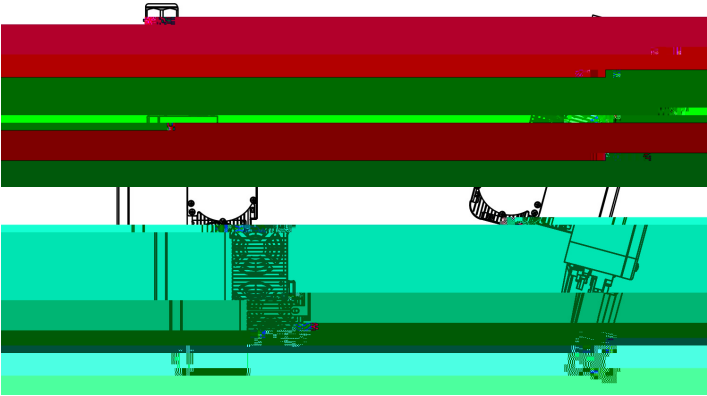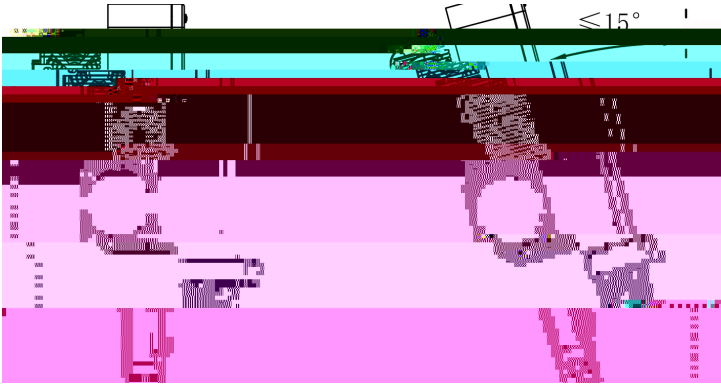

1

2


3

4



5





2.4

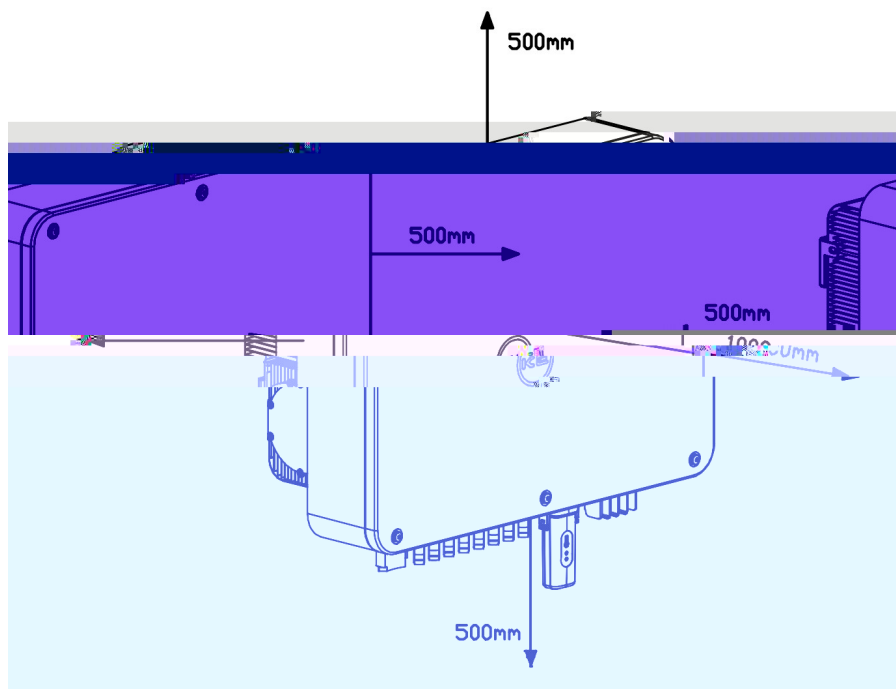

2.5

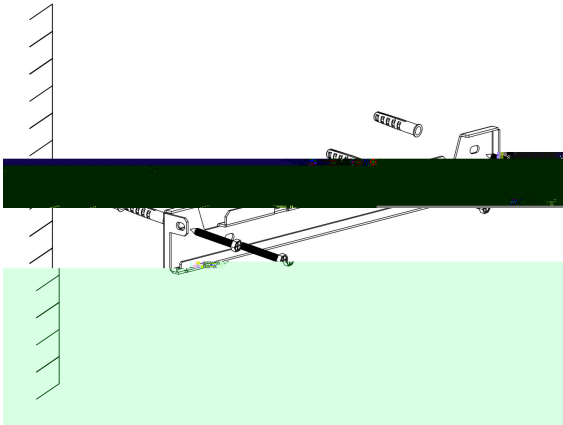
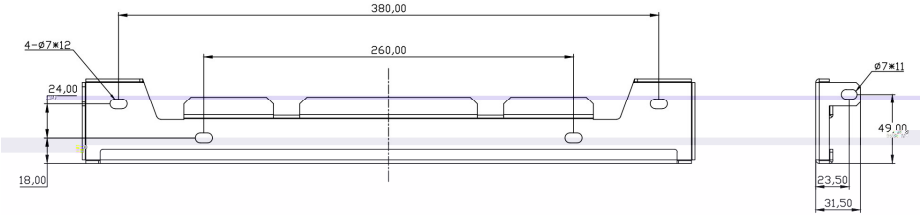



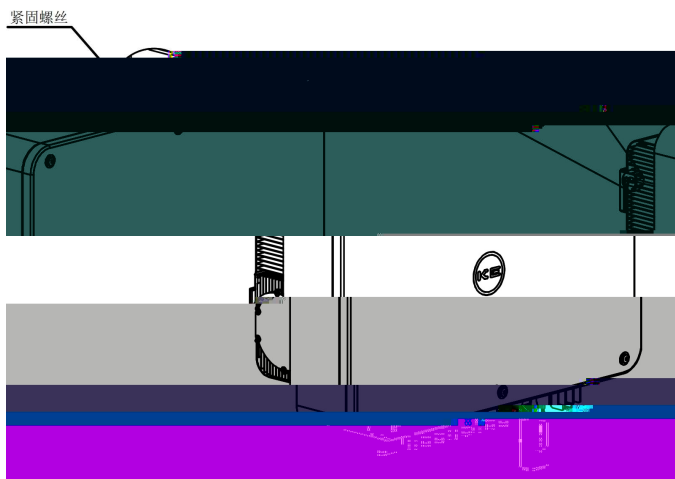
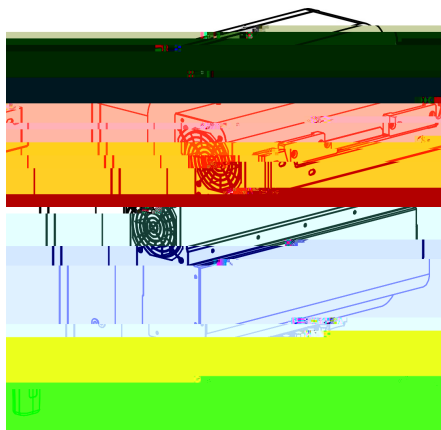



3

3.1

ö Ä

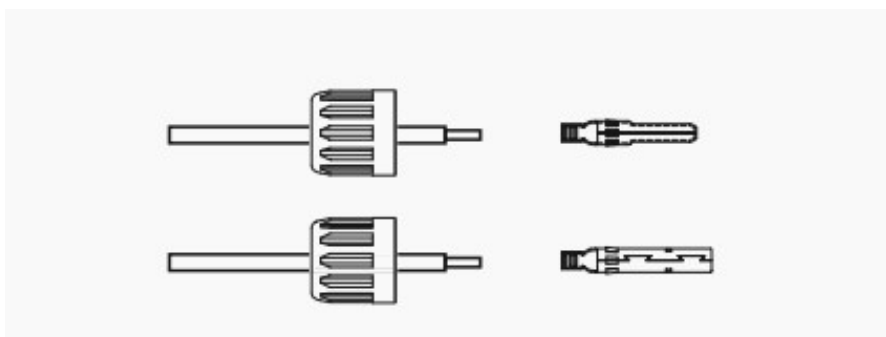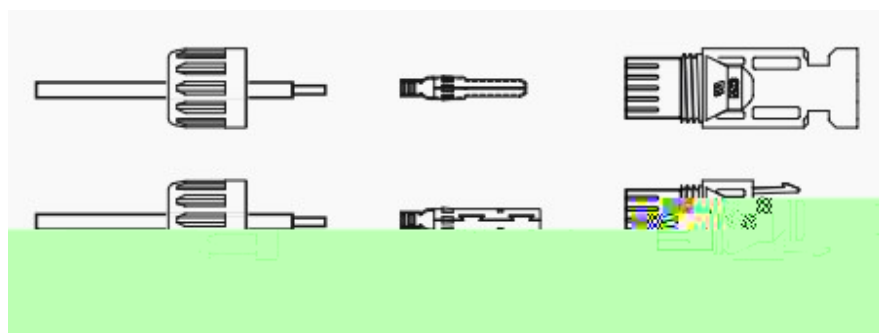


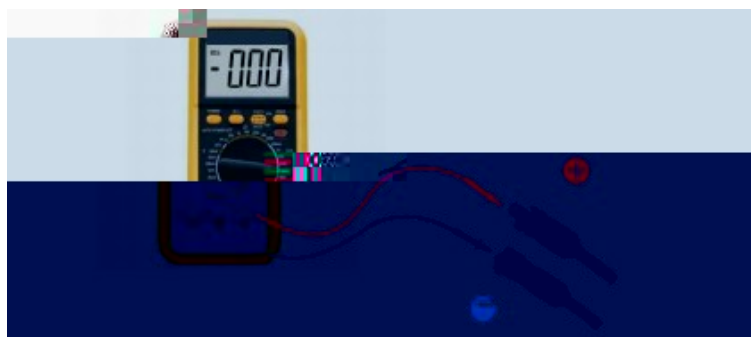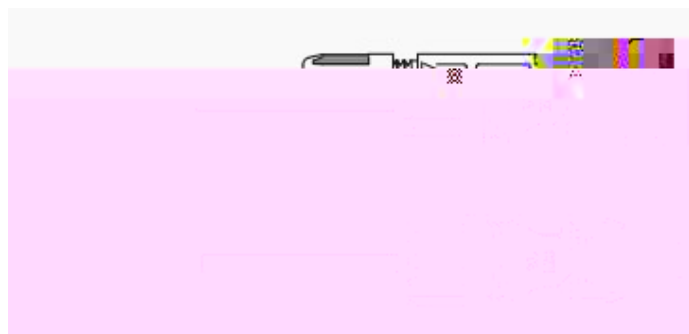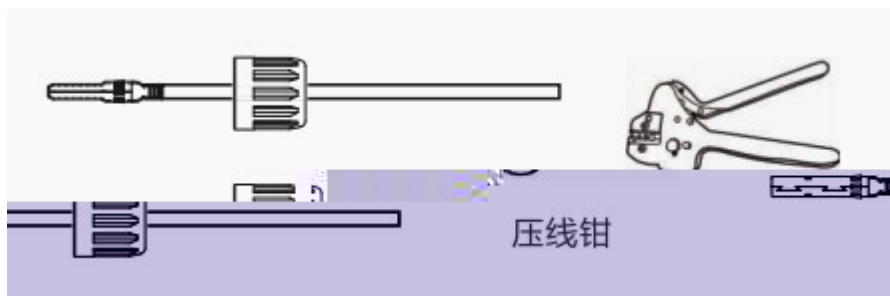

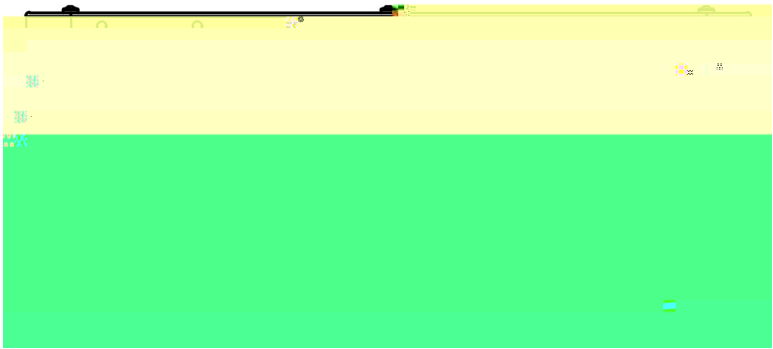


3.3




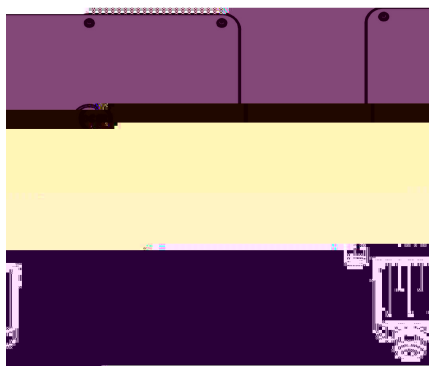

4~6Nm

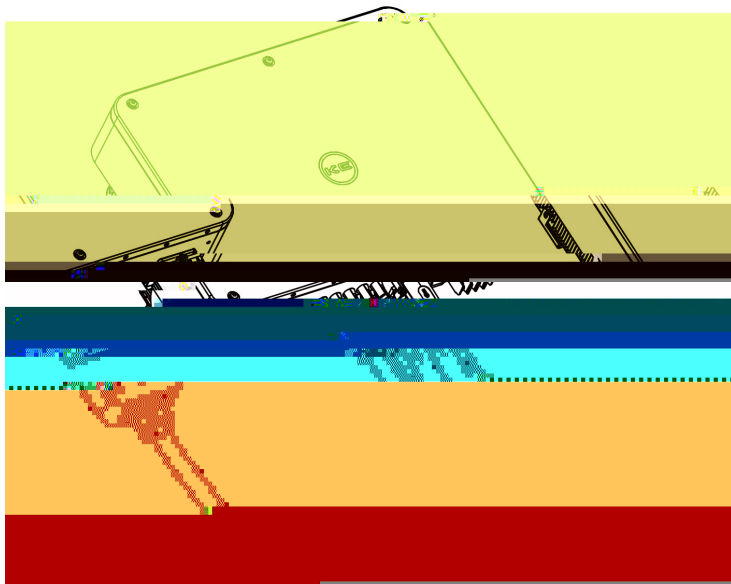

3.4 RS485

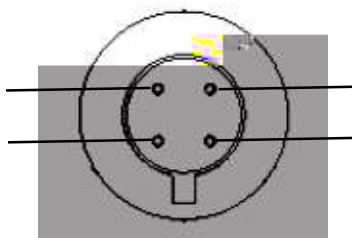


3.5




重要:

对于并联的多个逆变器，所有逆变器应连接到同一接地点，以确保接地线等电位连接。

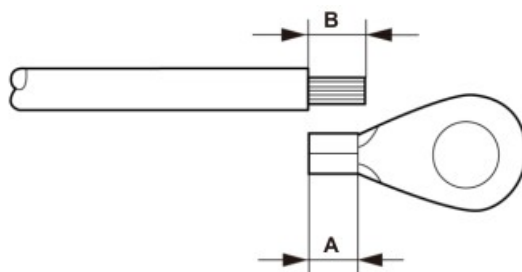


重要:

P (剥线长度) 比 A (OT线缆端子压接区域) 长2mm~3mm。

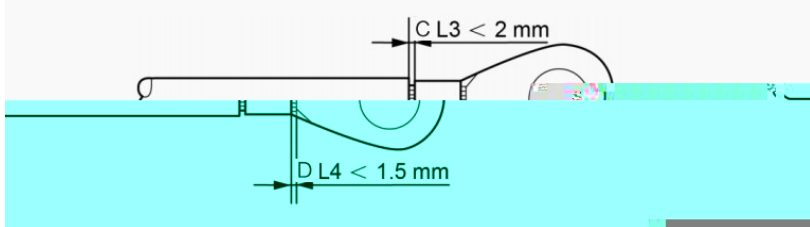

重要:

将端子压接到线缆后，检查连接以确保端子牢固地压接到线缆上。

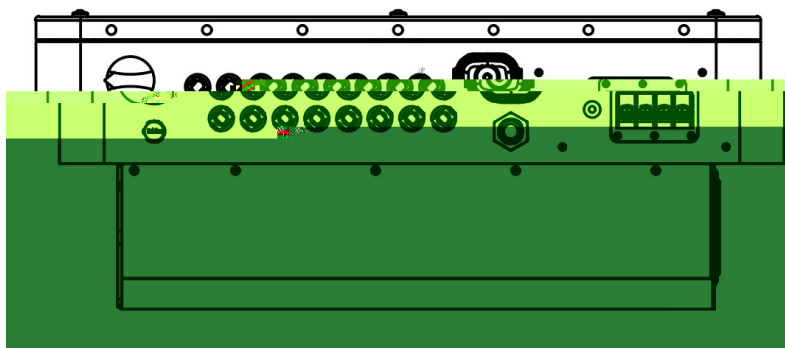

重要:

为提高防腐性能，安装接地线后，建议涂上硅胶或涂料。

4

4.1


4.2

5

5.1





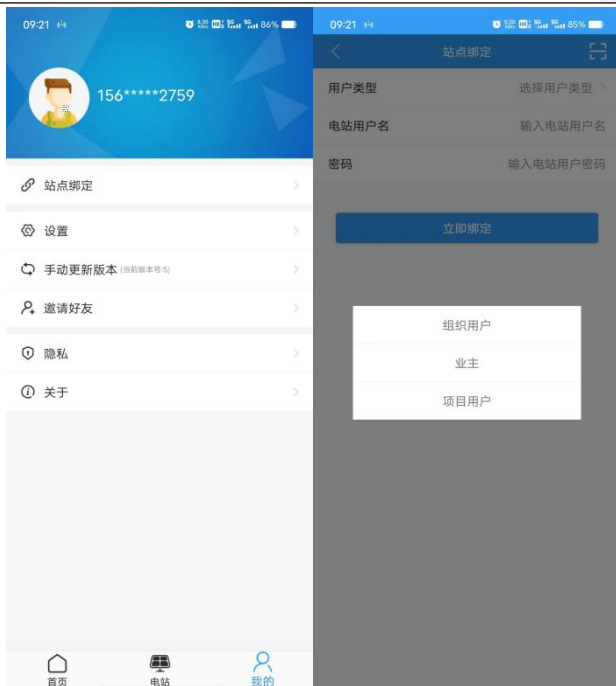

5.2

[illegible]

--	--



